


# NSC-G series Sliding Door Closer

## Self-Closing System for Glass Sliding Doors


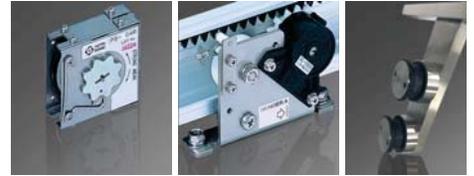


### Lineup



Model	Rail length	Max. Door Weight	Glass Thickness	Applicable Door Width	Max. Stroke
NSC-C60V-22-G	2200mm (86.6")	60 kgs. (132 lbs.)	10mm or 12mm (3/8" or 1/2")	600-1200mm (24-47")	1500mm (59")
NSC-C60V-31-G	3100mm (122")			1200-1600mm (47-63")	
NSC-C48-22-G	2200mm (86.6")	80 kgs. (176 lbs.)	10mm or 12mm (3/8" or 1/2")	700-1200mm (28-47")	
NSC-C48-31-G	3100mm (122")			1200-1600mm (47-63")	

- (1)system includes pull spring device, rotary gear damper, control gear rack, hangers(x2), door stopper, hold-open device, glass brackets(x2) and rail. Rail can be cut to preferred length.
- Recommended glass type: 10mm (3/8") or 12mm (1/2") tempered glass (The system does not guarantee the durability of glass.)
- Please choose the glass thickness (10mm=3/8" or 12mm=1/2") when ordering.
- The rail must be mounted on wall surface. (System is not compatible with the ceiling hanging type sliding doors.)
- Make sure that the wall/frame where the system will be installed have enough strength/stability to be able to hold the entire weight of the door and sliding door closer.
- Please prepare a suitable bottom guide for the glass door in order to avoid the door swinging. Please also prepare a floor door stop at front end of the door if necessary.

### NSC-C60V-G series (up to 60 kgs / 132 lbs doors)

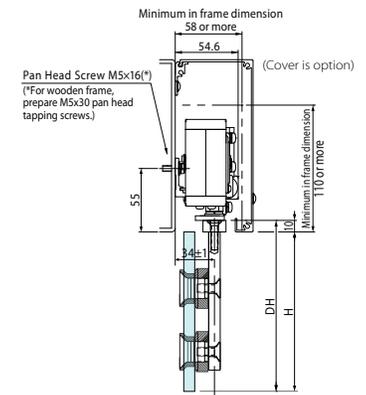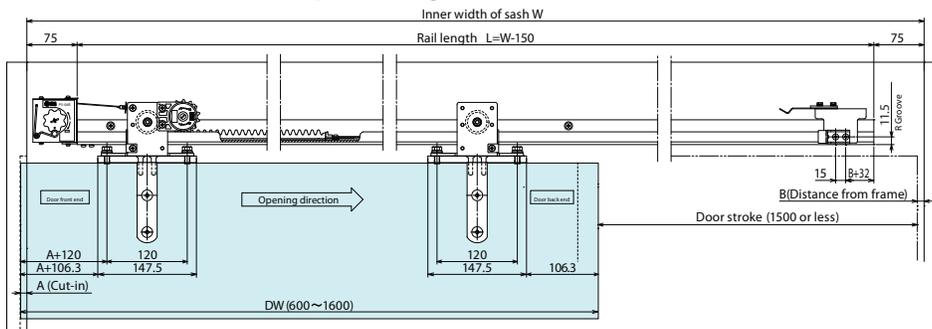

### NSC-C48-G series (up to 80 kgs / 176 lbs doors)

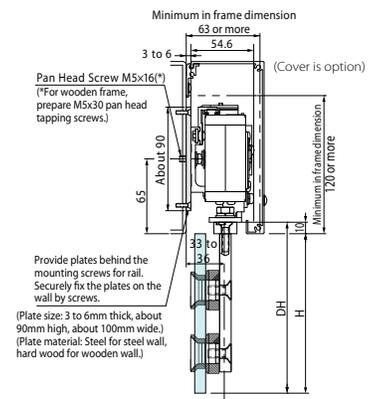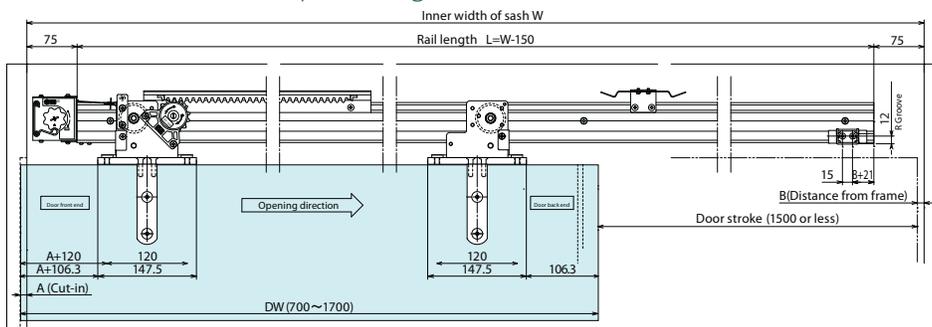

Unit: mm

### Options

Free Stop	Delayed Device	Close Assist Device	Bi-Parting Option	Pocket Door Option	Decorative Cover	Pull Handle
SFS-B-CV (for C60V-G) SFS-B (for C48-G)	SDA-CV (for C60V-G) SDA-C (for C48-G)	SCP-CV (for C60V-G) SCP-C (for C48-G)	SC-WCV (for C60V-G) SC-WC (for C48-G)	CKS-V (for C60V-G) CKS-C (for C48-G)	DC-C	KHS/KHU series
Stops the door at any desired position. To release, lightly pull the door so it will automatically close.	Holds the door at full open position for desired time period. Holding time is adjustable 0-15sec.	Catches and latches the door firmly for preventing door bounce. Pulling force is adjustable between 5N-10N.	Opening one side of doors will also open the other door. Both doors close automatically.	Enables easy access to major components after installing into the pocket door.	Decorative front cover for C60V-G/C48-G series. 2350mm (92.5") or 3250mm (128") Can be cut into preferred length.	Contemporary and modern style door handles suitable for wooden, steel and glass doors. Custom size, design and finish available.